## ALPHA® SERIES PANEL CONSTRUCTION




ALPHA ALL WELDED ALL STEEL **DELIVERING WHAT YOU WANT MOST** MEASURABLE HIGH PERFORMANCE AND **UNMATCHED DURABILITY - AT A COST THAT** MAKES SENSE.

- SUPERIOR PERFORMANCE Guaranteed field-tested sound control. Guaranteed operating force.
- UNMATCHED DURABILITY Unitized one piece all steel, robotically welded. 10-year limited warranty.
- COMPETITIVE COST Ask us for budget pricing for a variety of useful options and finishes.
- PROTECTIVE EDGE TRIM Saves the otherwise vulnerable exposed finish on corners of "wrap around" or "trimless" design. "Trimless" design available as an extra-cost option.

MANUAL & ELECTRIC: max. height 40'


PANEL WIDTH: 60" max. but do not exceed width of finish fabric

PANEL WEIGHT: 9.1 pounds per square foot





40 N.I.C. GUARANTEED WHEN SPECIFIED **TESTED IN ACCORDANCE WITH ASTM E336-05.** 42 N.I.C. IN ACCORDANCE WITH ASTM E336-97

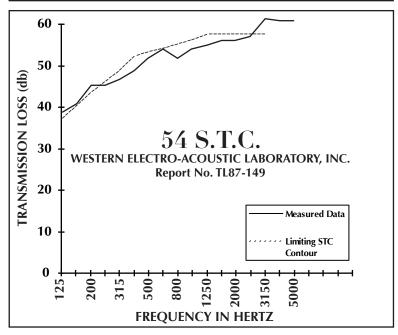

## **SPECIFICATIONS**

PANEL CONSTRUCTION: Acoustical panel, approx. 3 1/2" thick, incombustible, with 16 gauge steel faces fusion welded 8" o.c. (max.) to 16 gauge steel channel perimeter frame with 14 gauge top rail. Panel faces internally stiffened by welded steel members. Core shall be fibrous glass sound attenuating material. Panel weight shall be approx. 9.1 psf. Panel perimeter trim of approx. 1/8" thick aluminum alloy shall incorporate protective edge feature and form tongue and groove vertical intersections having multi-fin acoustical gaskets. Optional trim allowing finish to wrap around vertical edge. Panels shall be one piece; field joints not permitted. No fasteners shall be visible on panel face when wall is in extended position.

TEST DATA: Sound transmission class (S.T.C.) 54 when tested in accordance with ASTM E90-85 in NVLAP independent laboratory. Trolley late anchorage in panel top rail withstands a 10,000-pound minimum tensile load applied via pendant bolt. When tested in accordance with ASTM E-72, a 23'x4" panel resists a uniform load of 20 pounds per square foot applied normal to the panel face without damage.

(detail shows protective vertical edge trim)

