
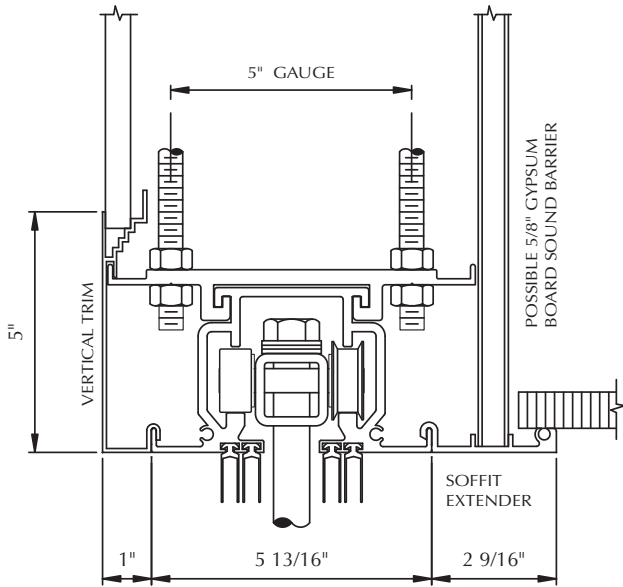



1 | TRACK | CONTINUOUS ALUMINUM TRACK

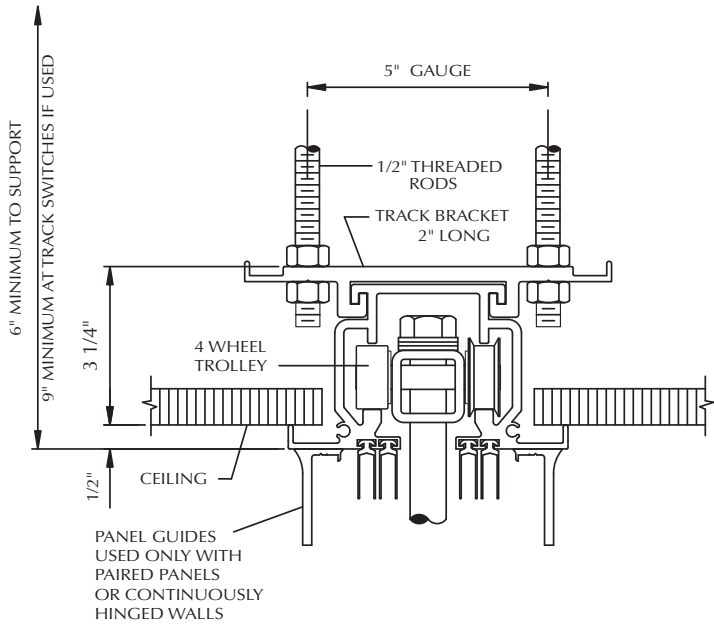

#1 track may be used for straight runs with paired panels, remotely-stored individual panels, or continuously hinged electric walls (see page 24).

2 YEAR WARRANTY

Maximum trolley load is 800 pounds.

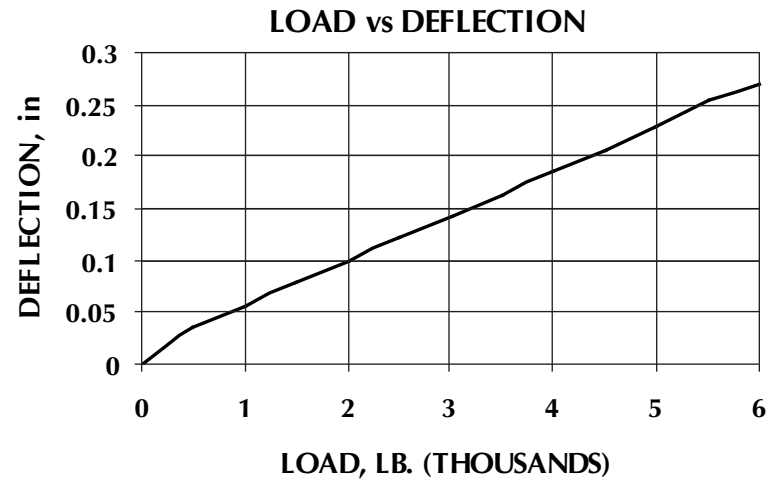

SPECIFICATIONS

Suspension system shall include Advanced #1 aluminum alloy track incorporating soffit trim and seal retainers. Track brackets interlock top flange and attach to structure with pairs of 1/2 inch diameter steel hanger rods. Approximate weight of track assembly is 7.5#/Lin. Ft.

TRACK: Track shall have minimum 6 inch-to-the-fourth moment of inertia. Provide test report from nationally recognized independent laboratory showing track/trolley/bracket/hanger rod assembly sustains a load of 6,000 pounds at mid point of 36 inch simple span without damage.

TROLLEYS: Trolleys to have four all-steel wheels 1 5/16 inch diameter with shielded and prelubricated ball bearings. Wheels to be independently replaceable. Pendant bolt to be 3/4 inch diameter and attach to panel through a steel plate mounted internally within panel frame. Individual trolley capacity is 800 pounds.

